


1

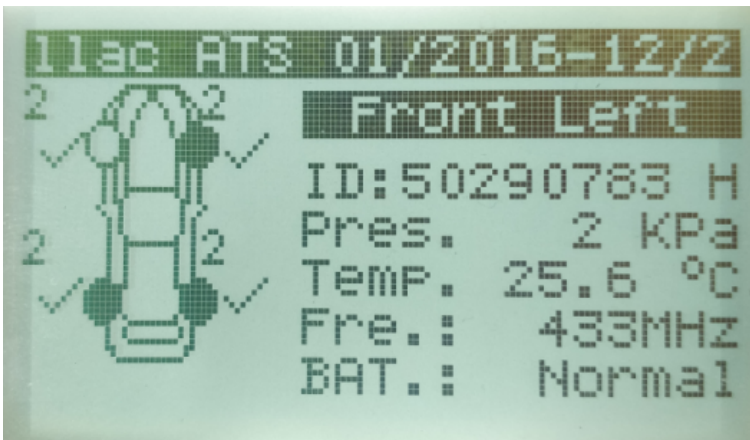

Picture 1

Choose the corresponding menu and activate all the sensors, see picture 1.

Note:

The sensor data from step 1 will be recorded in columns ID Hex/ID Dec (Picture 3). You can re-execute step 1 to refresh the record if the IDs are changed.

2



Picture 2

Go back to the main interface (picture 2), and connect TS401 to the computer via a USB cable. Find the disk of "AUTEL" on the computer and open the "RECORD.HTM" file to view the test record (picture 3). Then you can print or save the record.

2019/6/25 TPM Data

MaxiTPMS TS401

Vehicle Make Tested: Cadillac ATS 01/2016-12/2017

Test Performed On: 2019/6/25 6:09:36

Test Performed by:

Owner's Name:

License Plate No:

Model and Year:

Comments:

Wheel	ID Hex	ID Dec	Pressure	Temperature	Battery State	Modulation
FL	58079123	1476890915	2 Kpa	23.9 °C	OK	433AM
FR	587D776B	1484617579	2 Kpa	25.0 °C	OK	433AM
RR	588BBE4F	1485553231	2 Kpa	23.9 °C	OK	433AM
RL	58DA4097	1490698391	2 Kpa	25.6 °C	OK	433AM
SP	Untested	Untested	Untested	Untested	Untested	Untested

Picture 3